


**INSTALLER: Leave this manual with the appliance.
CONSUMER: Retain this manual for future reference.**

These instructions are supplementary to the Installation and Operating Instructions supplied with the fireplace and should be kept together. Refer to the Installation and Operating Instructions for proper gas supply, safety requirements and operating instructions.

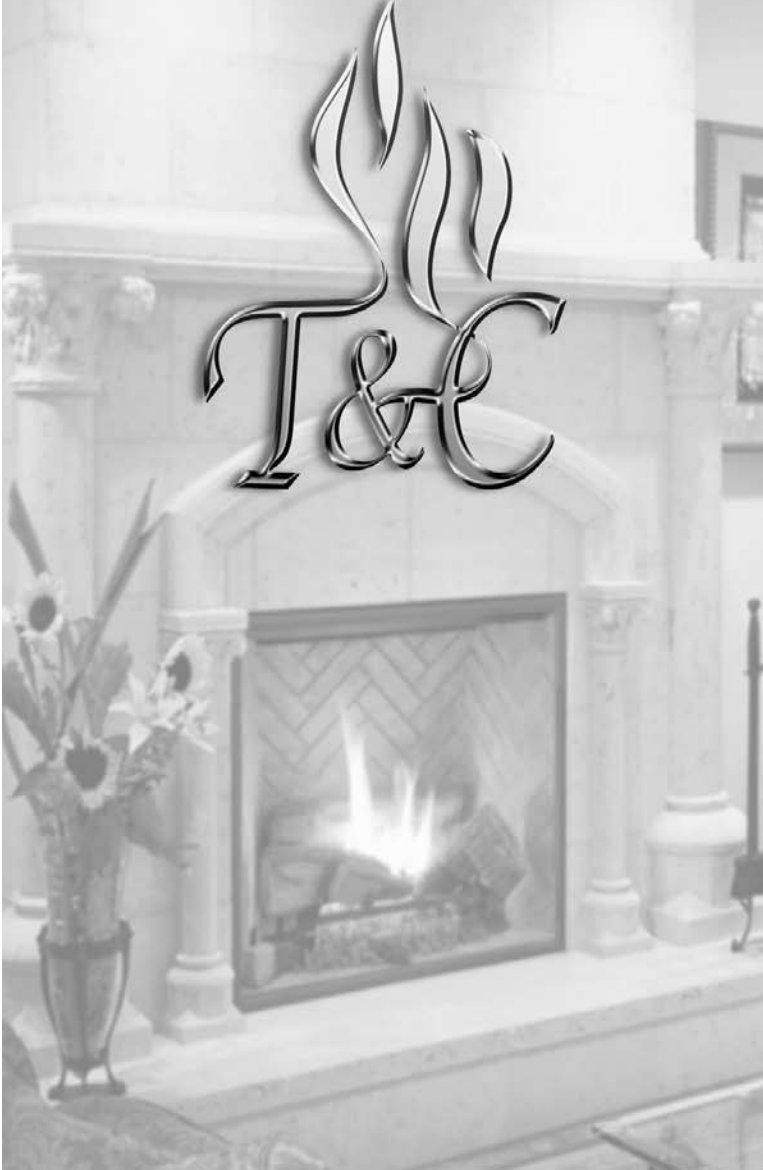

**TOWN & COUNTRY
FIREPLACES™**

TCWS.38NG04.C TRANQUILITY BURNER KIT INSTRUCTIONS




PART# TCWS.38NG04.C

**For use with
Model TCWS38
Series C**




Contents of Package

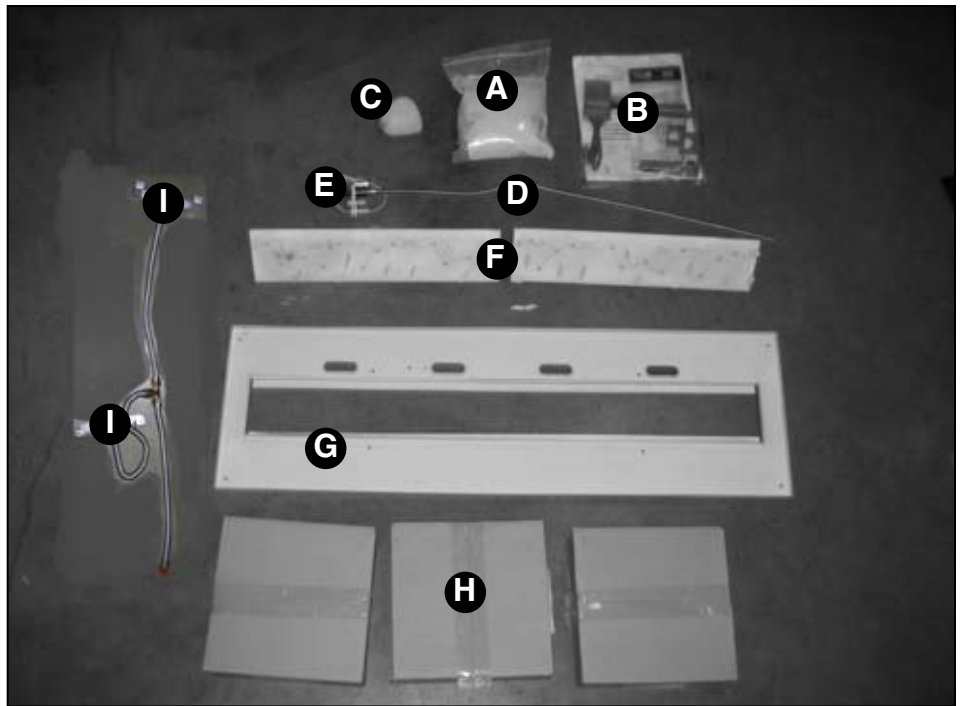

- A** 1 5.0 LBS SAND
- B** 1 HARDWARE PACK
- C** 1 EQUALIZER ROCK
- D** 1 1/4 SS PILOT SUPPLY TUBE
- E** 1 PILOT ASSEMBLY
- F** 2 BURNER ASSEMBLIES
- G** 1 BURNER TRAY ASSEMBLY
- H** 3 PEBBLE SETS
- I** 2 MANIFOLD BRACKETS WITH 1/2" SS FUEL SUPPLY TUBES

Tranquility Burner Installation

Fig #1

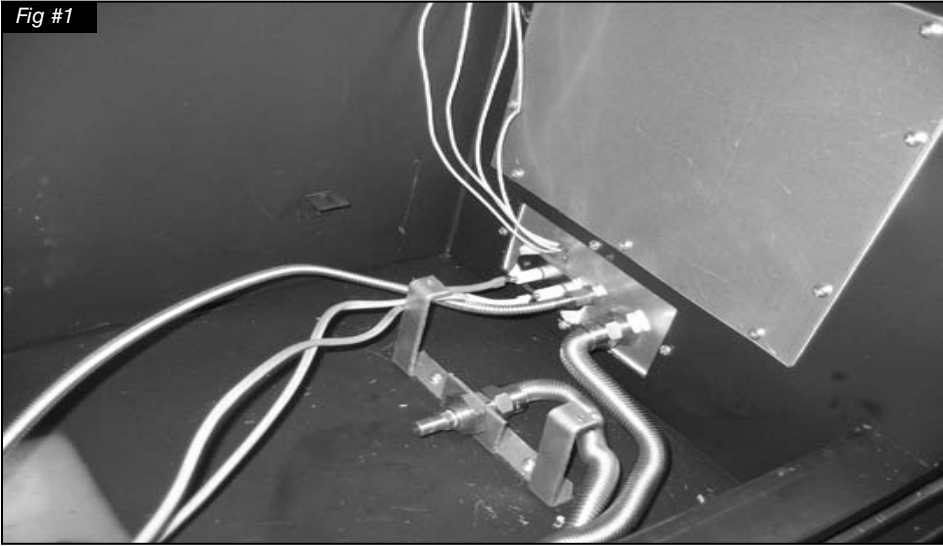

If converting to propane see conversion instructions on page #8 before proceeding.

Install panels according to the TCWS.38CE Installation and Operating manual prior to burner installation. (Page 23)

1. Attach the manifold brackets, with the fuel supply tubes, to the bottom of the firebox using four screws. (Fig. #3)
2. Remove Pilot and support bracket from burner tray.
3. Attach fuel supply tube and pilot assembly to bulkhead fittings. (Fig. #1)
4. Connect spark electrode wire (RED END) to the rear electrical bulk head fitting. Connect the flame sensor wire (WHITE END) to the front electrical bulk head fitting. (Fig. #2)

Fig #2



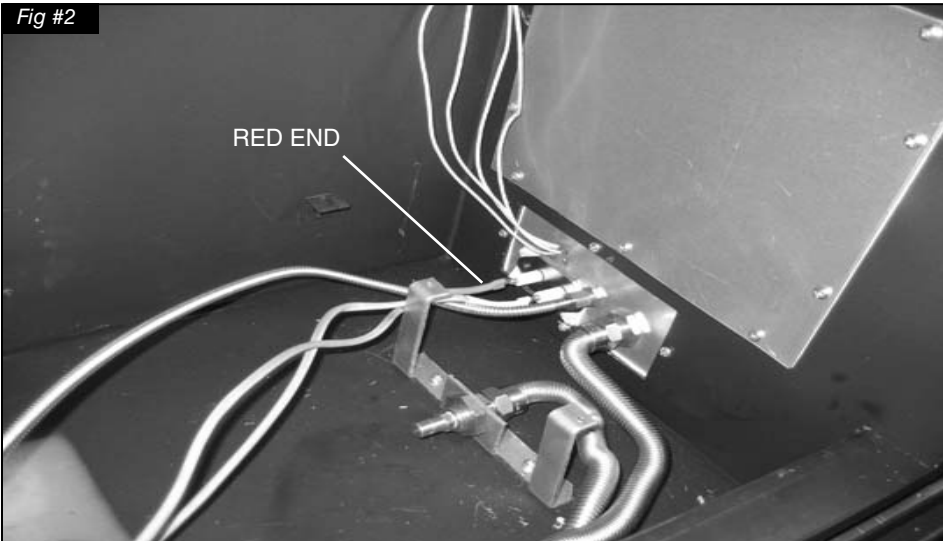


Fig #3

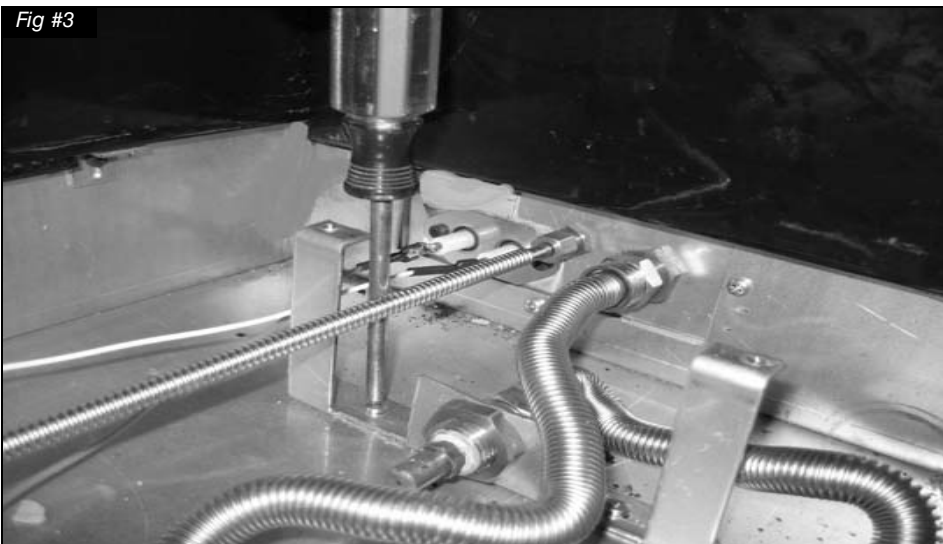

CAUTION: Ensure that all connections are gas tight.

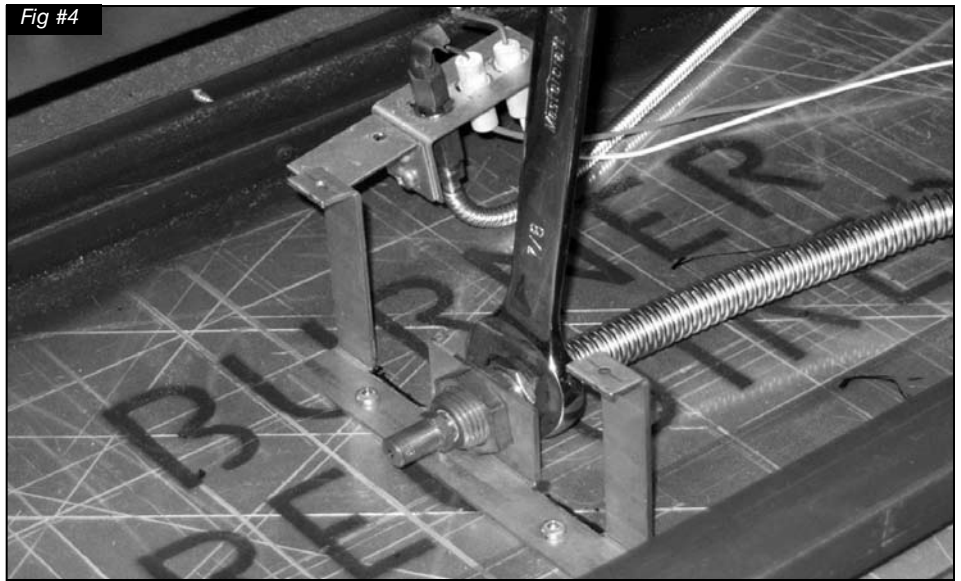

4. Tilt burner tray length-wise and insert into the firebox. (Fig. #5)




5. Attach pilot to burner tray. (Fig. #6)

NOTE: Ensure tht the pilot is tight up against the burner tray.



Fig #7

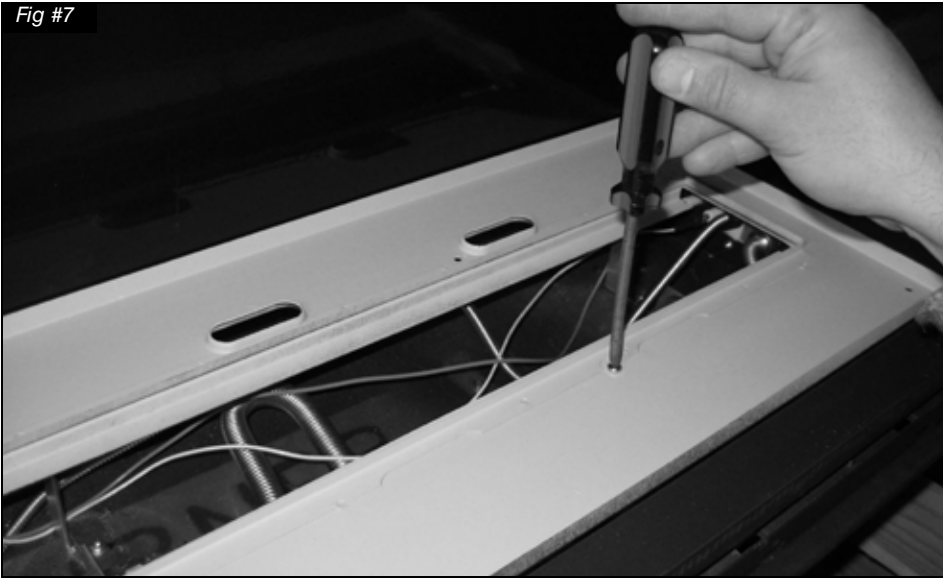


- 6. Secure the burner tray to legs using six screws (Fig. #7)

NOTE: a light will aid aligning the holes in the tray with the leg

Fig #8a



Fig #8b

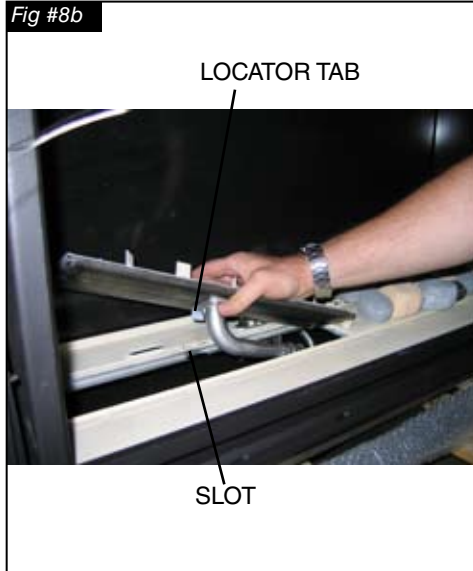

NOTE: check air shutter for correct setting for fuel before proceeding further. Both burners are the same. Fully closed for natural gas. 13/64 (0.2)'' open for LP.


- 7. Install the right burner by placing it into the center of the burner tray. With the left end elevated slightly, slide it to the far right. The primary air shutter should engage fully with the main orifice. Test for connection by lifting at a location pin on the right side of the burner. Repeat with left burner being sure that alignment tab engages in the slot in burner tray. (Fig. #8a & #8b)

- 8. Continue with panel installation.


CAUTION: The burners should be tightly butted up against each other at the center to ensure correct operation.

- 9. Place sand into the burner tray and brush smooth. Use caution not to get sand near the burner ports. (Fig. #9)

Fig #9

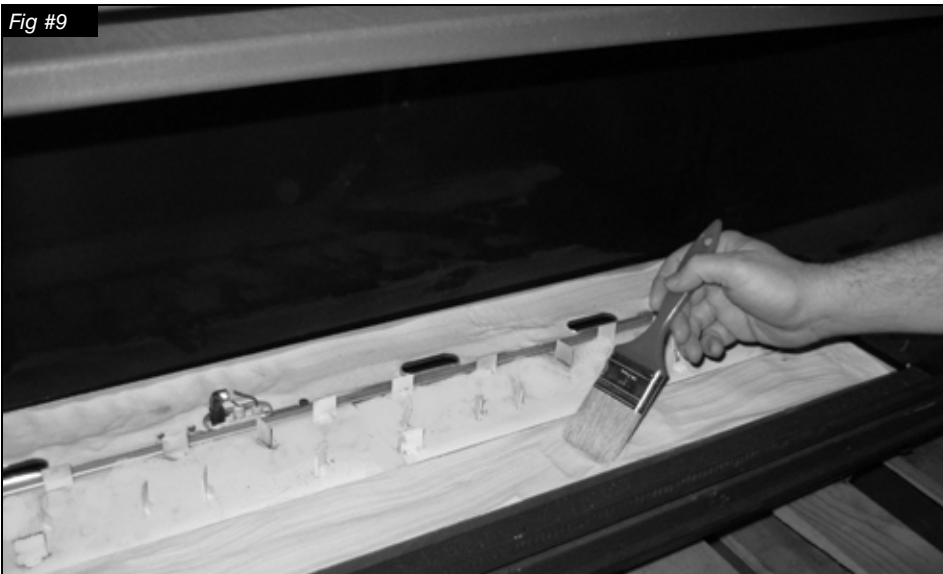

9. Each rock has a slot in its base and is marked with a letter and an arrow. (Fig. #10)

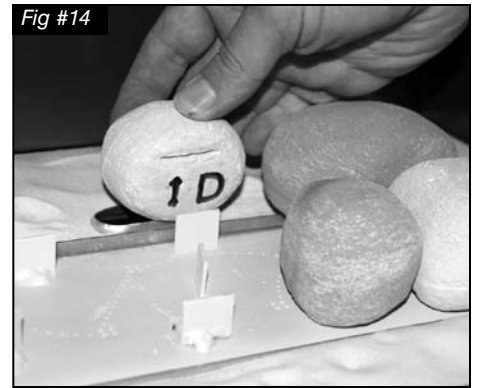

10. Place each rock as per the following photographs, start from the right hand side of the burner and ensure that the arrow on each rock points towards the front of the fireplace. (Fig. #11 to 21)

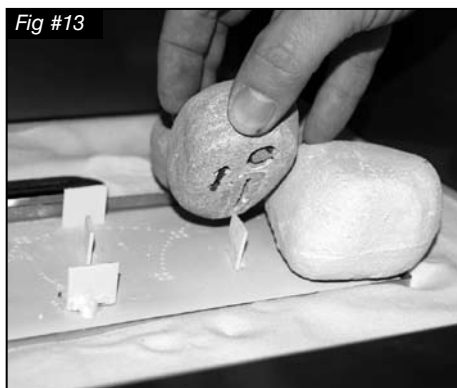
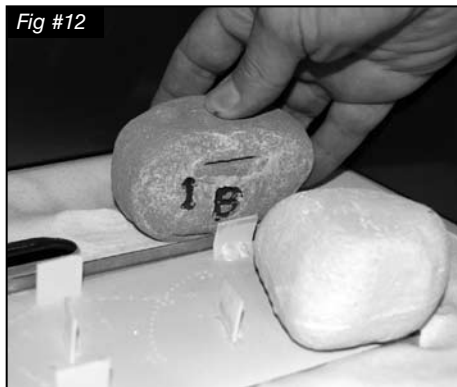
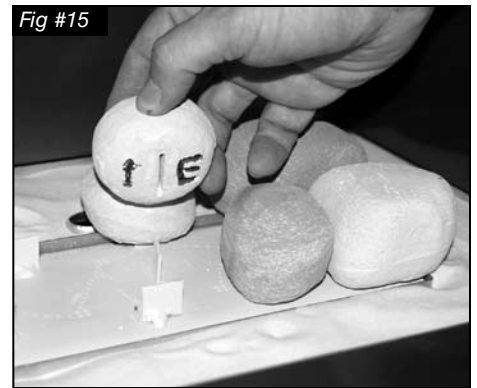
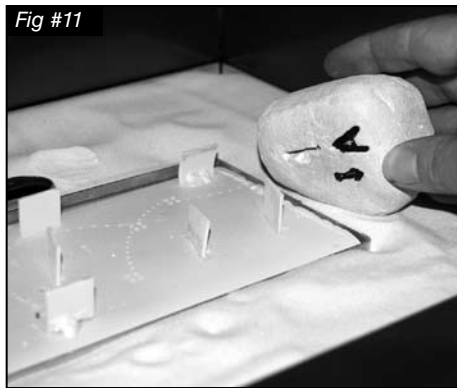


Fig #18



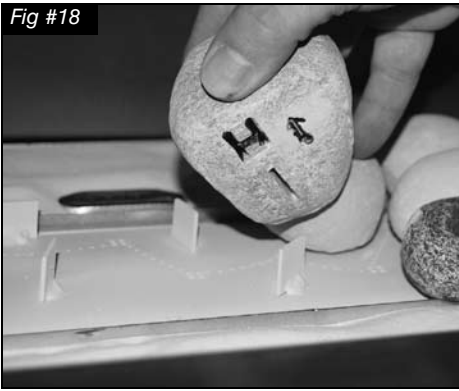


Fig #21

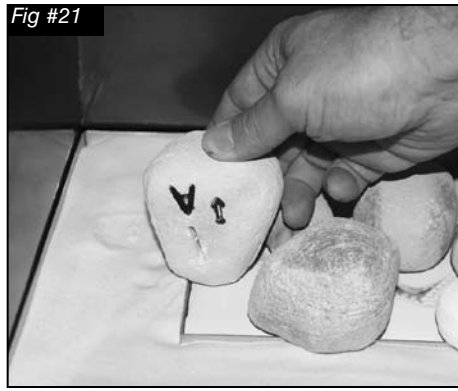

- 12. Place the remaining (A) rock on the left hand end of burner as shown. (Fig. #21)

Fig #19

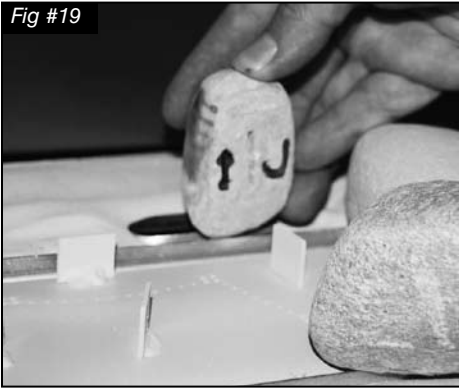

- 11. Repeat the sequence of placing the rocks two more times until the burner is covered.

Fig #20


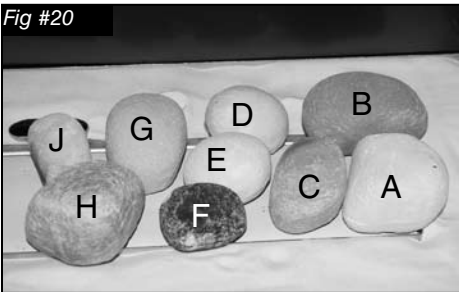


Fig #22

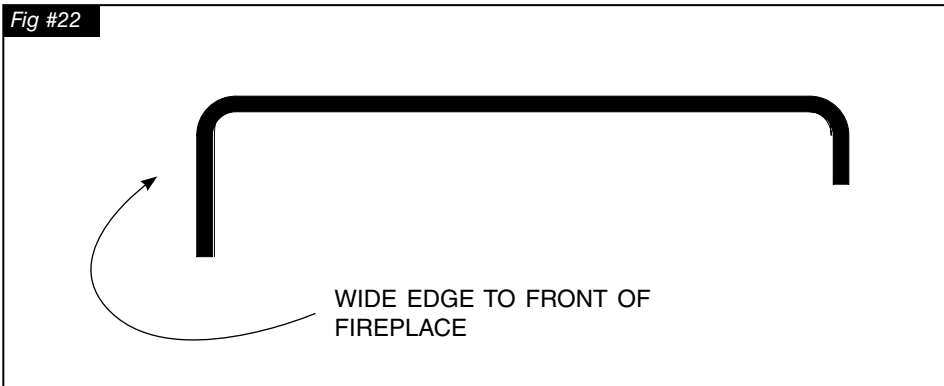

- 13. Install front porcelain cover (wide edge should face the front). (Fig. #22)

Propane Conversion

If the unit is to be used on propane convert as follows using the components supplied with this burner:

CAUTION

The gas supply and electrical power shall be shut off before proceeding with the conversion.

CAUTION:

Factory supplied components must be used to ensure correct input. After conversion confirm proper manifold pressure.

WARNING

This conversion kit shall be installed by a qualified service agency in accordance with the manufacturer's instructions and all applicable codes and requirements of the authority having jurisdiction.

If the information in these instructions is not followed exactly, a fire, explosion or production of carbon monoxide may result causing property damage, personal injury or loss of life.

The qualified service agency is responsible for the proper installation of this kit.

The installation is not proper and complete until the operation of the converted appliance is checked as specified in the manufacturer's instructions supplied with the kit.

Fig #23 PROPANE CONVERSION KIT



Kit # TCWS.38LPCE01 for use with model /
Pour utiliser avec du modèle: TCWS38
SERIES C

Date: _____

By / Par: _____

PACIFIC ENERGY

LP GAS/ DU GAZ LP

12.5 in/wc / 12.5 po/c.e.

(3.11 kPa)

13.9 in/wc / 13.9 po/c.e.

(3.45 kPa)

11.0 in/wc / 11.0 po/c.e.

(.95 kPa)

1.45 mm

Max.: 47,000 (13.8)

Min.: 35,000 (10.3)

This appliance was converted to PROPANE GAS with this kit on this date by the organization which accepts the responsibility that this conversion has been properly made. / Cet appareil est converti au gaz LP par l'emploi de la trousse de conversion par une organisation qui accepte la responsabilité pour une installation en bon état.

160409 6-TCWS38 5052.52087

CONVERSION LABEL (5052.52087)



1. If installed remove the rocks from the burners.
2. If installed remove the burner from the burner tray by gently lift up the left side of the burner and disengage the venturi tube from the orifice. (Fig. #24)
3. Using a 1/2" wrench, undo the natural gas burner orifice, (marked #40). Apply a small amount of pipe joint compound to the threads of the propane burner orifice (marked 1.45mm) to ensure a good seal, before screwing it into the fitting.

Loosen the primary air shutter screw, open shutter to give a gap of 1/8" (0.125") and re-tighten. Repeat on other burner. (Fig. #26)

4. With a 7/16" wrench loosen the pilot head on the pilot assembly. (Fig. #27)

Fig #24



Fig #25

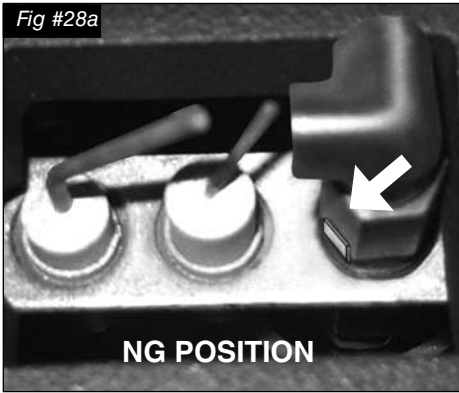


Fig #26




Fig #27





- Slide the pilot adjustment band over and ensure that the hole in the orifice band is showing. (Fig. 28b) Retighten pilot head.

◀ Fig. #28a shows NG position
 Fig. #28b shows LP position). ▶

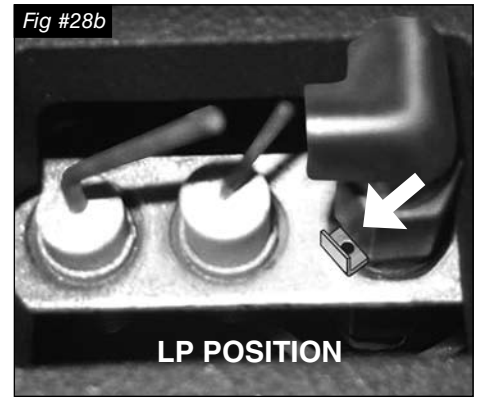


- Remove the access panel on the right side of the firebox, 10 screws, and set aside. (Fig. 34)





- Remove the minimum rate screw located in the valve. (Fig. #29)

The minimum rate screw is sealed with an O-ring. Use a thin bladed screwdriver to back the screw out past the limit of the threading. At this point a groove on the screw body will be visible just above the valve body. Insert a thin tool (knife blade or fine screwdriver blade) into the groove and gently pry the screw up. It helps to rotate the screw while lifting on it.

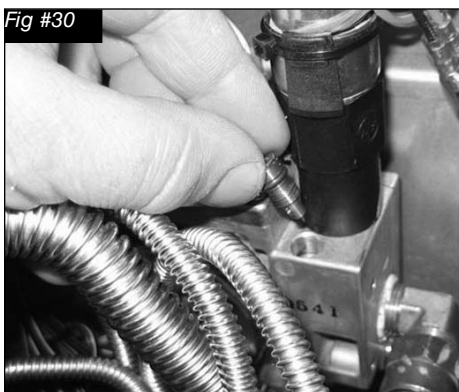


- Replace the minimum rate screw with the one provided in the propane conversion kit supplied with this fireplace. Ensure that the screw is fully seated. (Fig. #30)

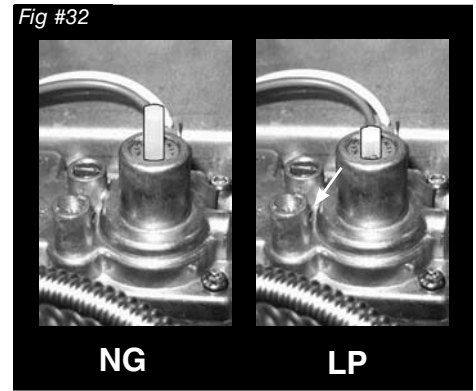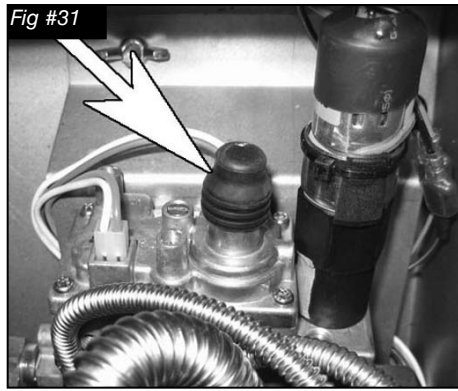

9. Pull off the rubber cap from the top of the pressure regulator. (Fig. #31)
10. Press down on the center post and rotate 90°. The center post should stay down. (Fig. #32). Replace the rubber cap.
11. Check all connections for leaks

Fig #33

 Kit # TCWS.38LPCE01 for use with model / Pour utilise avec du modèle: TCWS38 SERIES C	
Date:	
By / Par:	PACIFIC ENERGY
LP GAS/ DU GAZ LP	
12.5 in/wc /12.5 po/c.e. (3.11 kPa) 13.9 in/wc / 13.9 po/c.e. (3.45 kPa) 11.0 in/wc / 11.0 po/c.e. (.95 kPa)	
1.45 mm	
Max.: 47,000 (13.8) Min.: 35,000 (10.3)	
160409 6-TCWS38 5052.52087	

ADD DATE →

← ADD NAME

This appliance was converted to PROPANE GAS with this kit on this date by the organization which accepts the responsibility that this conversion has been properly made. / Cet appareil etair convertir au gaz LP par l'emploi de la trousse de conversion par une organization qui accepte la responsabilité pour une installation en bon état.

12. Fill in the date and the name of the person who performed the conversion in the white area on the conversion label. Peel off the protective backing and apply the conversion label directly over the gas specifications on the rating label.



13. Re-attach the access panel with gasket to the side of the firebox with the screws previously removed. (Fig. #34)
14. If the burner was removed in previous steps, replace in reverse order or return to installation process on Pg. 3.

WARNING: The access panel including gasket must be reinstalled after conversion/ installation or servicing has been completed. Failure to do so will overheat and cause premature failure of the control system.

Gas Pressure Check

Note: To test the gas pressure, turn off the gas supply before removing the plug from the supply pressure test port or manifold pressure test port.

Verify gas pressures with the fireplace lit and on the highest setting.

Fig #35



1. Remove the plug from the pressure test port using a 3/16" hex key. The plug is located between the right side lintel and firebox side. (Fig. #35)

Fig #36

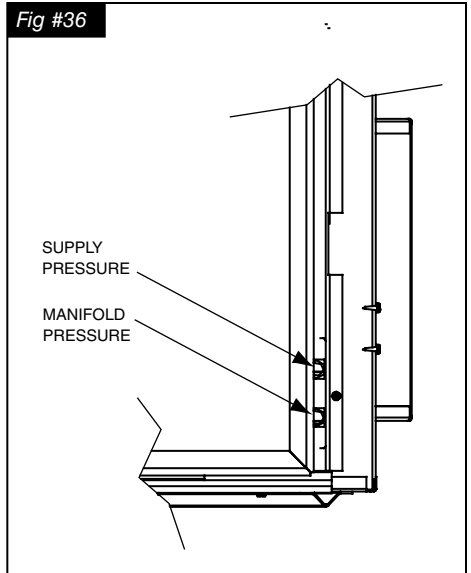


Fig #36



2. Thread the extension test fitting into the open port. (Fig. #36)
3. Attach a pressure gauge onto the fitting.
4. When testing is complete shut off the gas, remove the fitting and replace the plug. Thread sealant will be required to ensure a gas tight connection.

Correct gas pressure requirement:

Supply Pressure	Natural Gas	Propane
Min. Pressure <small>(For purpose of input adjustment)</small>	5.0" WC	12.5" WC
Max. Pressure	13.9" WC	13.9" WC
Manifold Pressure		
Maximum	3.8" WC	11" WC
Minimum	2.1" WC	5.5" WC

Burner Flame Adjustment

The air shutter on the venturi tube controls the primary combustion air. It is set to the closed position at the factory for natural gas fuel. For LP see Pg.8. Some adjustment may be necessary to obtain desired flame and to eliminate carbon deposits. Evaluate flame appearance after the fireplace has reached operating temperature. See Fig. #37 for proper flame pattern.

Open primary air if the window glass and firebox have carbon accumulation and/or the flames are long, dark and stringy. The shutter may also be opened to lessen the flame height.

Fig #37



NOTE:
Proper air shutter setting is required.

The flame should be just orange and “lazy”. It should NEVER be set to create sooting on internal parts and window glass.


Replacement Parts

(WHEN ORDERING, INCLUDE PART NUMBER WITH DESCRIPTION)

ITEM.....	DESCRIPTION.....	PART NO.
#1.....	TRANQUILITY BURNER KIT.....	TCWS.38NG04.C
#2.....	PEBBLE ASSEMBLY	5096.921 (3)
#3.....	FUEL SUPPLY TUBE	5019.223
#4.....	PILOT ASSEMBLY.....	TCRP.5005025C
#5.....	ORIFICE, NATURAL GAS (#40).....	5022.3

ITEM.....	DESCRIPTION.....	PART NO.
* #7	PROPANE CONVERSION KIT.....	TCWS.38LPCE01
* #8	SAND	TC36.SAND50
* #9.....	TRIM ROCK "A".....	5096.922

* NOT SHOWN

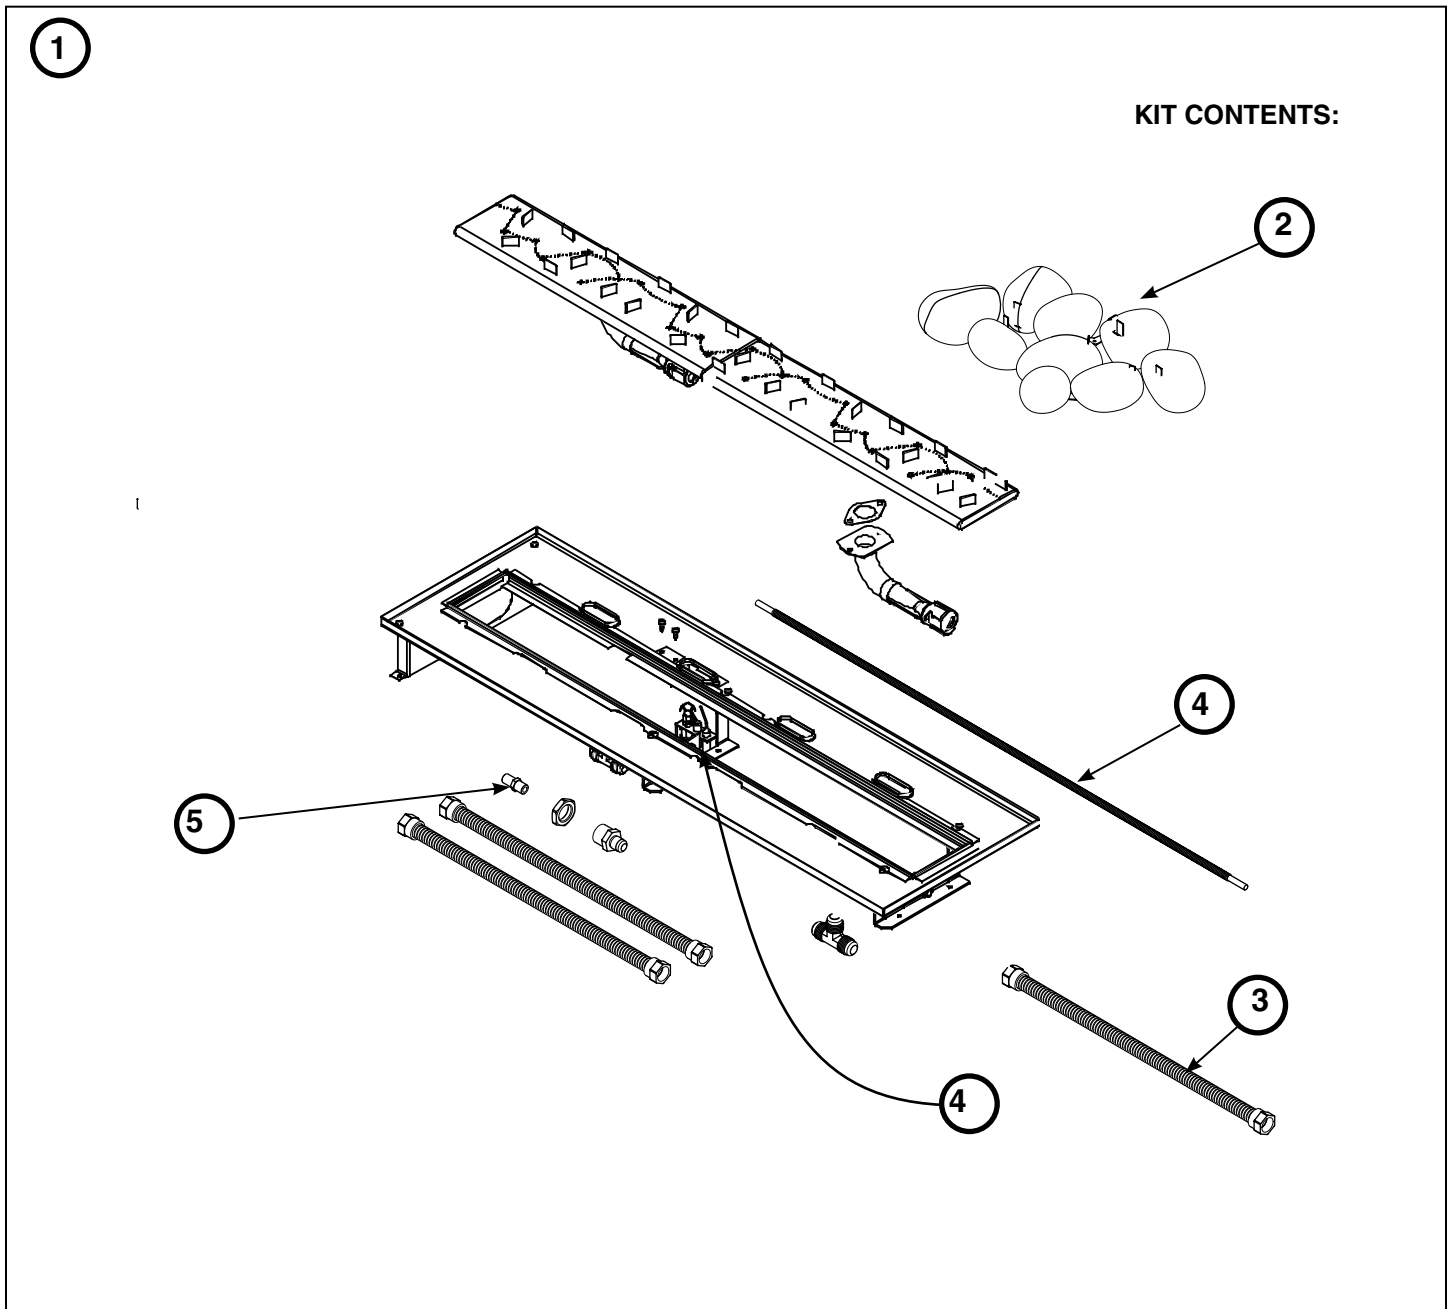

Notes:

Notes:



TOWN & COUNTRY
FIREPLACES™

Technical support: 1-250-748-1184
Web site: www.townandcountryfireplaces.net
2975 Allenby Rd., Duncan, BC V9L 6V8